



Emergency Telephones

100% Australian Owned

www.emergencytelephones.com.au

Explosion Proof Telephones

ETEX1



ETEX2



Sales and Service:



Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au



100% Australian Owned

www.emergencytelephones.com.au

Features:

- Analogue telephone matches most PABX, PBX and PAX system
- Robust body vandal resistant
- Busy tone detection, auto releases if the line is busy
- Dry contact for external control automation
- Auto answer
- Full Soft lock: only dials out from phone book (50 memory address numbers)
- Half soft lock: limit to dial out (starting number, e.g. "2044" area code)
- High temperature approval
- Ring sound 95 dB dfd from 1m
- Listening by loudspeaker: 70dB from 1m
- Phone book memory: 50 address (name & number) programmable
- Stainless steel keypad
- Magnetic reed hook-switch
- Telephone line powered. No external power or battery required



LCD display:

- Manu settings
- Programmable welcome text
- Full soft lock or half soft lock
- Phone book up to 50 address
- Ring speaker up to 4 levels
- Hands free talking up to 4 levels
- Handset receiver sound up to 4 levels
- Up to 9 ring tone melodies
- Back light up to 4 levels
- The dialing number
- Calling time counting



Sales and Service:



Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au





Emergency Telephones

100% Australian Owned

www.emergencytelephones.com.au

Specification

Unit dimension	227 x 293 x 135mm
Unit Weight	5.8kg
LCD Display:	2 line alphanumerical display ICON or number or letter Up to 4 level back light selectable
Keypad	stainless steel flash mount Waterproof IP66. Ice protection 21 keys with number and ACE letter for program
Handset:	dynamic receiver with inductive coupling for hearing aids Electret type microphone with noise cancelling Stainless steel armoured handset hold over 170kg
Waterproof protection	IP66
Impact protection:	IK09
Call Flash transfer:	max:120ms
Dialling procedure:	DTMF
External function:	external louder speaker additional earpiece headset ringl sounder
operation temperature:	-25°C to 60°C
Storage temperature:	-30°C to +70°C

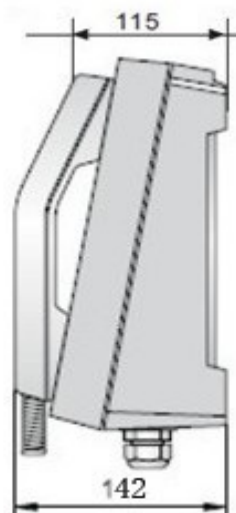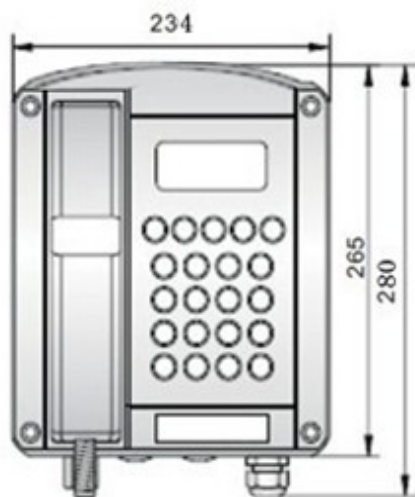

Sales and Service:



Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au