



Emergency Telephones

www.emergencytelephones.com.au

Wireless Hands-Free Emergency Telephone

Model: ETG-3000 ANALOGUE/GSM/VOIP

GSM TELEPHONE SOLAR POWERED

Both Handset type and hand-free type available

Main Features:

1. Metal body, solid and temperature bearable
2. Handset free, loudspeaker,
3. Heavy duty Vandal resistant buttons.
4. With or without keypad optional
5. Lightning protection standard to ITU-T K21
6. Waterproof grade about IP55
7. Body with grounding connection protection
8. Support hotline call, self stop if the other side hang up.
9. Built-in loud speaker, noise canceling microphone
10. Lighting will flash when there is a incoming call
11. AC 110v/220v powered or built-in rechargeable battery with solar powered panel optional
12. The design is super thin and smart. Embed style and hanging style can be chosen.
13. Time out function optional
14. Colours: RED + Stainless steel , If the qty over 100pcs can be To customer specification
15. Trouble report via SMS/GPRS: Low battery, keypad get stuck, AC power supply failed, LED defective..temper...etc.



Specification of GSM version:

1. **Network Interface:** GSM Frequency : 850/900/1800/1900MHZ
2. **Ringng:** Through internal Speaker/ringer
3. **Power Supply:** Re-chargeable Battery powered: 9V/14Ah, Solar back-up: 12V/30W
4. **Time out:** selectable 0-20 minutes
5. **Temperature:** -20°C~ +60°Cemp
6. **Relative Humidity:** up to 90%
7. **Built-in battery Standby:** 56days
8. **Built-in battery talking time:** 21 hours

Specification of VOIC OVER IP- SIP (Optional)

Connection type: RJ45 Socket inside sealed enclosure

Power supply: External 24V dc

Call set-up Protocol: Session Initiation Protocol(SIP)

Configuration: DHCP or STATIC IP address provisioning

Applications:

As Public telephone for outdoor, Taxi or bus stands or station, Highway call box. Railway, Port, Dock, Generation facilities....A good ideal telephone for use in wet or corrosive atmospheres

Sales and Service:

Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au



service@emergencytelephones.com.au



Emergency Telephones

www.emergencytelephones.com.au

Telephone layout

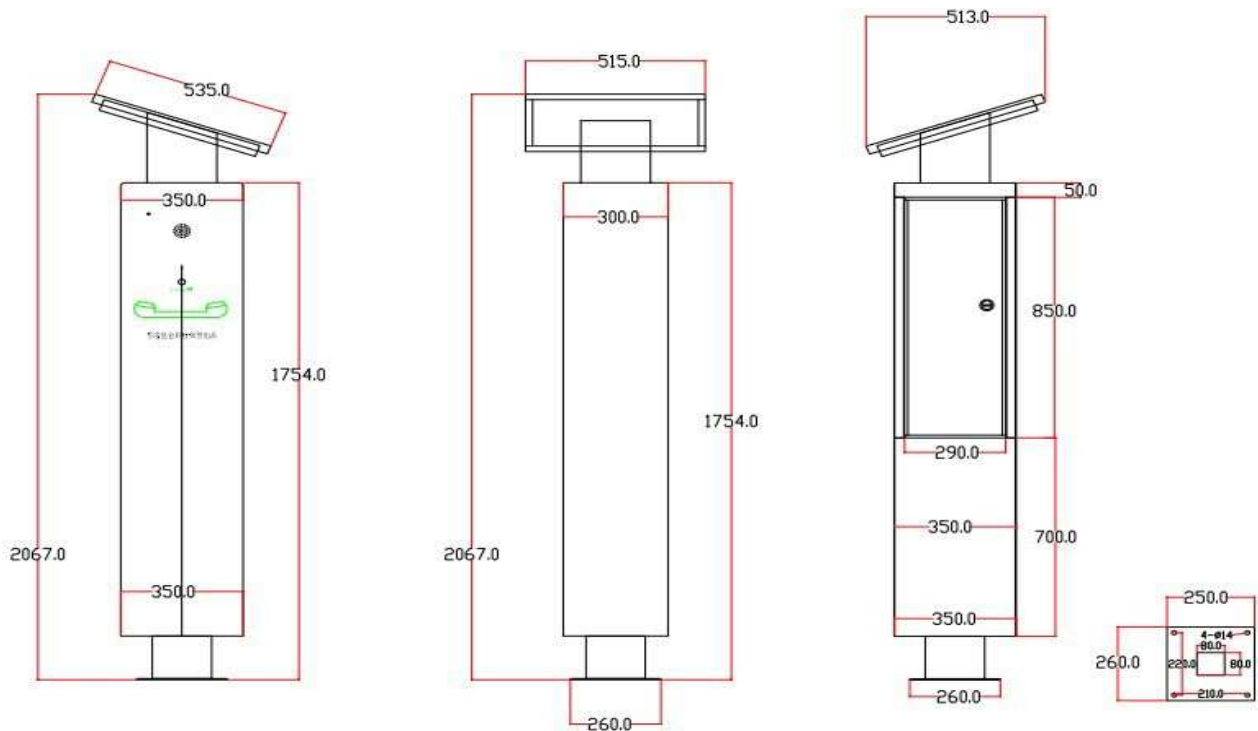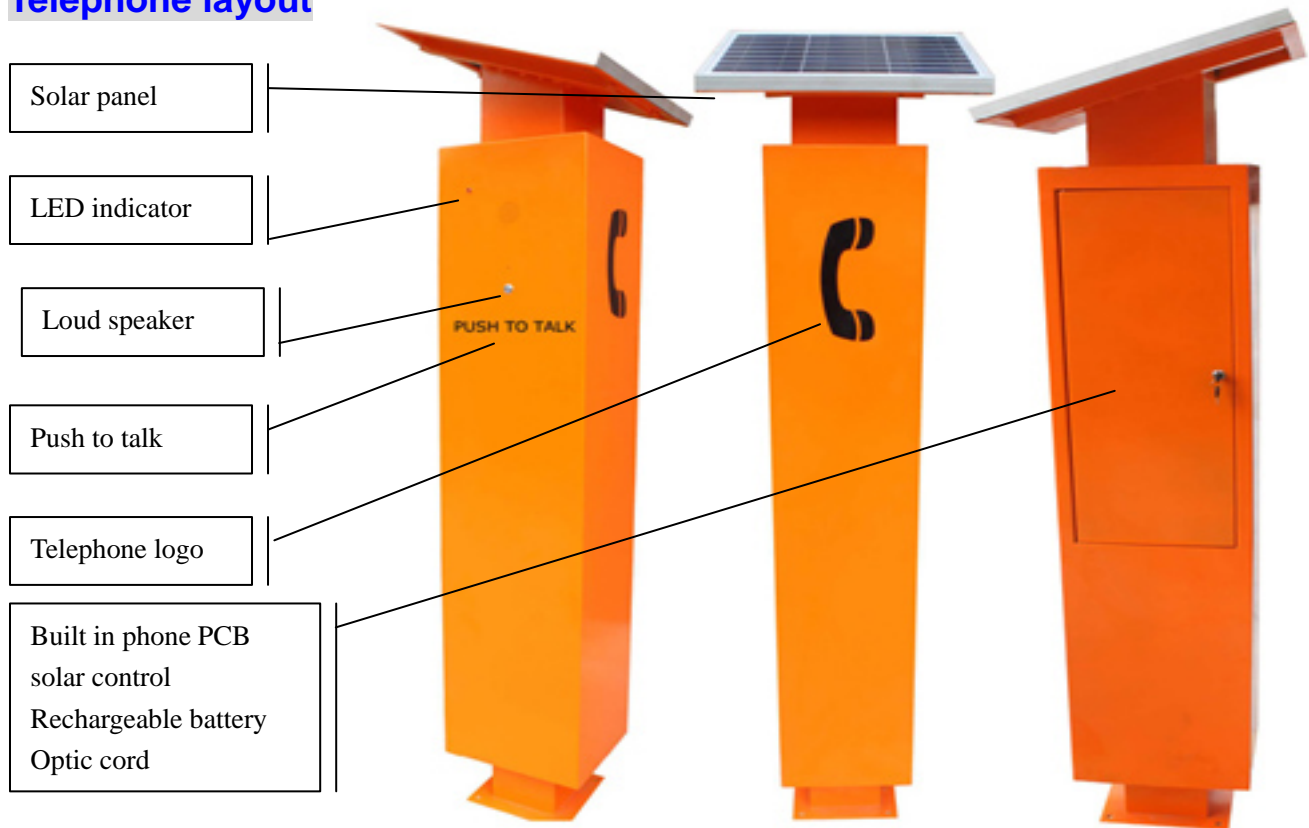

Sales and Service:

Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au

Certification:

EMC: EN50121 (Railway application- Electromagnetic Compatibility)
EN55022: emissions EN55024: immunity
Ingress Protection: GB4208-93 IP66
FCC
ITU-T Recommendations K21



IP66



RoHS

Packaging:

Telephone Unit size: 2067*335*515mm Unit Net weight: 90kg
2pcs in a wooden box CTN box, size: 350X800X2550 G.W: 186kg
20GP: 88PCS 40GP: 176PCS 40HQ: 205PCS

Reference Photo:



Sales and Service:

Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au



AUSTRALIAWIDE PAYPHONES HAVE A COMPLETE BACK UP SERVICE SUCH AS TECHNICALLY QUALIFIED TECHNICIANS AND A MODERN WORKSHOP FACILITY WHICH INCLUDES ALL PARTS AND ACCESSORIES FOR ALL MAKES AND MODELS OF PAYPHONES.

NOTE: QUOTE INCLUDES ON SITE DEMONSTRATION IF REQUIRED

IF WE CAN ASSIST YOU WITH FURTHER INFORMATION OR BROCHURES PLEASE DON'T HESITATE TO CONTACT US.

Sales and Service:

Emergency Telephones

PO Box 606 Rockdale NSW 2216

Telephone: 02-9599-9555

Fax: 02-9599-9225

Email: sales@emergencytelephones.com.au

service@emergencytelephones.com.au